


2600FTTAB (CC 600 D TAB) SERIES

Plate Materials: POM-DP, POM-LF

Pin Material: Cold rolled austenitic stainless steel

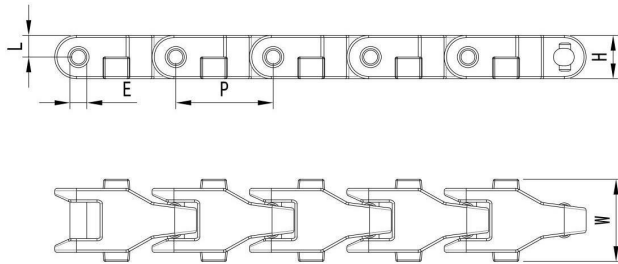

Dimension mm

P	63.5
M	23.3
W	54.0
H	28.4
E	11.0
L	14.3

2600FTTAB (CC 600 D TAB) (Side Flexing Case Conveyor Chains)

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
2600FTTAB	54.0	5.51	2100	472	200	7.87	40	1.57	1.40